

# Monocrystalline PV Module MUL-8M-330W-60


Power Output	Power Tolerance	Maximum Efficiency
300-330W	0~+5W	19.8%

- Superior silicon cells, High efficiency solar panel, Most cost-effective and ideal option for power station.
- Excellent encapsulating materials and strict production process to ensure highly resistance against PID (Potential Induced Degradation) of PV module.
- High transparent self-clean tempered glass to increase the light adoption and effectively reduce the power loss which is caused by dust.
- Pass the test for weather resistance in harsh environments (salt mist, ammonia corrosion and sand)
- Reinforced frame with more remarkable loading capacity.
- 1500V highest affordable system voltage to effectively reduce the BOS cost.



## MULTIFIT Offers Long-term Quality Assurance

- 12 years Product Warranty
- 25 years Linear Power Output Warranty
- The attenuation of the power output in the first year  $\leq 2\%$ , the annual average attenuation after the first year  $\leq 0.55\%$

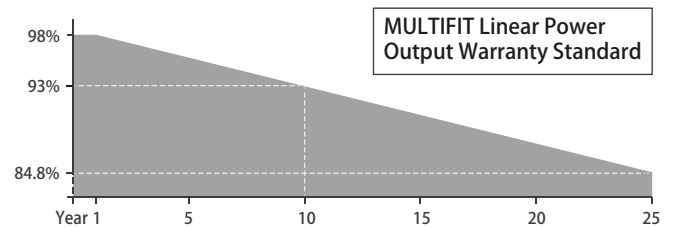

\* More details please read the guarantee letter.

## Product Certification & Management Certification

- IEC61215/IEC61730/IEC61701/IEC62716
- ISO 9001:Quality Management System
- ISO 14001:Environment Management System
- ISO 45001:Occupation Health Safety Management System



## MUL-8M-330W-60

### Electrical performance parameters (STC)

Power Output	Pmax(W)	300	305	310	315	320	325	330
Rated Power Maximum Voltage	Vmp(V)	32.4	32.6	32.8	33.0	33.2	33.41	33.61
Rated Power Maximum Current	Imp(A)	9.26	9.36	9.46	9.55	9.64	9.73	9.82
Open Circuit Voltage	Voc(V)	39.5	39.7	39.9	40.1	40.3	40.5	40.7
Short Circuit Current	Isc(A)	9.78	9.87	9.96	10.04	10.12	10.20	10.28
Module Efficiency	(%)	18.0	18.3	18.6	18.9	19.2	19.5	19.8
Power Tolerance	(W)	0~+5W						

\* STC : 1000W/m2 irradiance, 25° C module temperature, AM1.5 spectrum.

### Electrical performance parameters (NMOT)

Power output	Pmax (W)	222.60	226.50	230.43	233.78	237.47	240.87	244.61
Rated Power Maximum Voltage	Vmp (V)	30.00	30.20	30.40	30.60	30.80	31.00	31.20
Rated Power Maximum Current	Imp (A)	7.42	7.50	7.58	7.64	7.71	7.77	7.84
Open Circuit Voltage	Voc (V)	36.60	36.80	37.00	37.20	37.40	37.50	37.70
Short Circuit Current	Isc (A)	7.91	7.98	8.05	8.12	8.18	8.25	8.32

\* NMOT:800W/m2 irradiance, 20°C module temperature, 1m/s wind speed.

### Structure Features

Solar Cell	MONO
Solar Cell Array	60 pcs
Module Dimension	1666×1002×35mm
Weight	18.5 kg
Glass	3.2 mm (0.13 inches) highly transparent anti-reflection coating tempered glass
Back sheet	White
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm <sup>2</sup> L=900 mm、PV cable
Diode Quantity	3
Wind Pressure/Snow Pressure	2400pa / 5400pa
Connector	MC4 Compatible

\* More details please read the installation manual.

### Temperature Characteristics

Solar Cells Rated Working Temperature	44±2°C
Temperature Coefficient (Isc)	+0.057%/°C
Temperature Coefficient (Voc)	-0.31%/°C
Temperature Coefficient (Pmax)	-0.39%/°C

### Maximum Ratings

Working Temperature	-40~+85°C
Maximum System Voltage	1000V DC 1500V DC
Maximum Fuse Rated Current	15A


### PACKAGING

Number of modules per pallet	31 pcs
17.5*2.8m Flatbed loading	1488 pcs
13.0*2.35m Flatbed loading	868 pcs
20GP Standard container	372 pcs
40HQ Standard container	868 pcs


### Optional

Connector	<input type="checkbox"/> Original MC4
Cable length	<input type="checkbox"/> 1000mm <input type="checkbox"/> 900mm
Frame	<input type="checkbox"/> Black
Solar Module Dimension	<input type="checkbox"/> 1666x1002x40mm
Back sheet color	<input type="checkbox"/> Black <input type="checkbox"/> Transparency


### Module Dimension

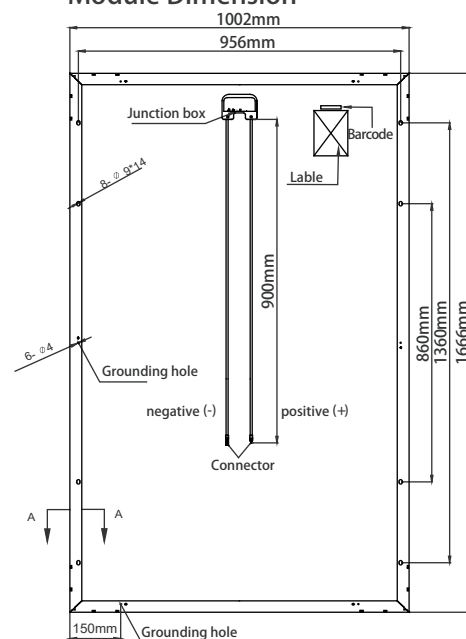


### Back view



### I-V curves of module under different temperature(320w)

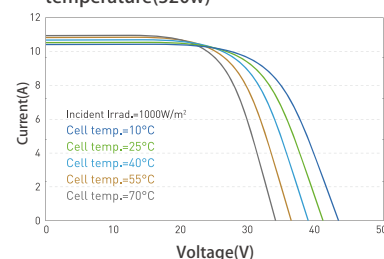

### I-V curves/P-V curves of module under different irradiation(320w)

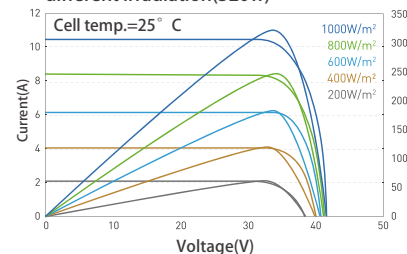

Power measurement error +/-3%