



Single-Phase on/off grid Solar Inverter Single-phase ESS hybrid inverter



Product features:

Safe & reliable


- Passed IEC/EN62109-1/-2, IEC/EN62477-1, South Africa NRS097-2-1:2017, IEC/EN 61000-6-1, IEC/EN 61000-6-3 test certification;

Friendly & flexible

- Support multi-parallel connection;
- Support flexible access of diesel generator;
- Compatible with lead-acid and lithium-ion battery;

Economical & practica

- Support intelligent EMS management function;
- Support on/off-grid automatic switching function to ensure uninterrupted power when important loads are off-grid;

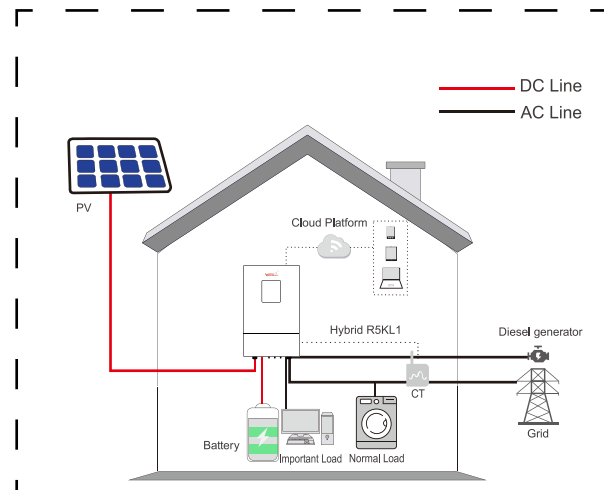

Vmaxpower residential hybrid Based on the low-carbon concept, Residential solution perfectly with the grid to realize uninterruptable power supply for the users.





Single-Phase on/off grid Solar Inverter
MULT3KL1~MULT6KL1

Technical specification:

Technical specification	MULT3KL1	MULT3K6L1	MULT4KL1	MULT4K6L1	MULT5KL1	MULT6KL1
Input (PV)						
Max. power(kW)	4.6	4.6	6	6	7	7
Max. DC voltage(V)	550					
MPPT voltage range(V)	125~500					
Max.input current of single MPPT(A)	14					
MPPT tracker/strings	2/1					
AC output						
Rated output power(kVA)	3	3.68	4	4.6	5	6
Max. output current(A)	13	16	17.4	20	21.7	26
Grid voltage/range(V)	230/176~270					
Frequency (Hz)	50 /60					
PF	0.8lagging-0.8leading					
THDi	<3%					
AC output topology	L+N+PE					
Battery						
Battery voltage range(V)	40~58					
Max. charging voltage(V)	58					
Max. charge/discharge current(A)	95/62.2	95/75	95/83.3	95/95.8	95/104.2	95/110
Battery type	lithium /Lead-acid					
Communication interface	CAN/RS485					
EPS output						
Rated power (kVA)	3	3.68	4	4.6	5	6
Rated output voltage(V)	230					
Rated output current(A)	13	16	17.4	20	21.7	26
Rated frequency (Hz)	50 /60					
Automatic switching time (ms)	<20					
THDu	<2%					
Overload capacity	110%, 30S/120%, 10S/150%, 0.02S					
General data						
Battery chage/discharge efficiency	95.0%					
DC Max. efficiency	97.6%					
Europe efficiency	97.0%					
MPPT efficiency	99.9%					
Ingress protection	IP65					
Noise emission (dB)	<35					
Operation temperature	- 25 C ~ 60 C					
Cooling	Natural					
Relative humidity	0 ~95% (non-condensing)					
Altitude	2,000m(>2,000 Derating)					
Dimensions W * D * H (mm)	550*200*515					
Weight (kg)	25					
Isolation transformer	No					
Self-consumption(W)	<3					
Display and communication						
Display	LCD					
Interface:RS485/Wifi/4G/ CAN/DRM	Yes/ Opt/ Opt/ Yes/ Yes					
Safety standard	IEC/EN62109-1/-2, IEC/EN62477-1					
EMC	IEC/EN 61000-6-1, IEC/EN 61000-6-3					
On-grid	South Africa NRS097-2-1:2017, UK G98,G99					